



CONTROL I

ELEN3016

System Modelling

(Lecture 3)

Overview

- First Things First!
- More Examples of Mechanical Systems
- Tutorial Exercises & Homework
- **Next Attraction!**

First Things First!


- Tut & Lecture Swap
 - Lecture on Wednesdays & Tut on Thursdays
- Consultation
 - Wednesdays 8:30 – 10:00 AM
- Lab Due Date(s)
 - We need to agree on a date by end of next week
- Lecture Notes

http://dept.ee.wits.ac.za/~vanwyk/ELEN3016_2012/

Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Input: Torque, $T(t)$ Output: Angle, $\theta_2(t)$

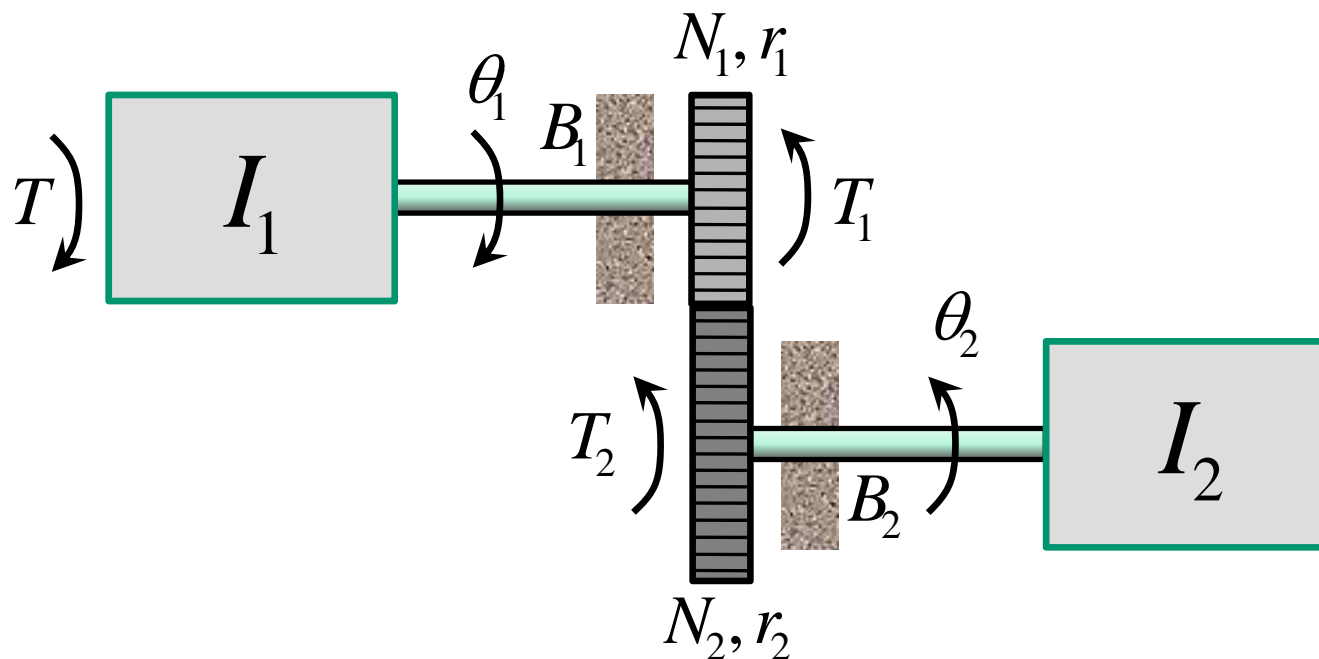


- Internal reaction torques: $T_1(t) = r_1 X(t)$, $T_2(t) = r_2 X(t)$
- Internal reaction force: $X(t)$ (See to Burns, Example 2.3)

Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Input: Torque, $T(t)$ Output: Angle, $\theta_2(t)$

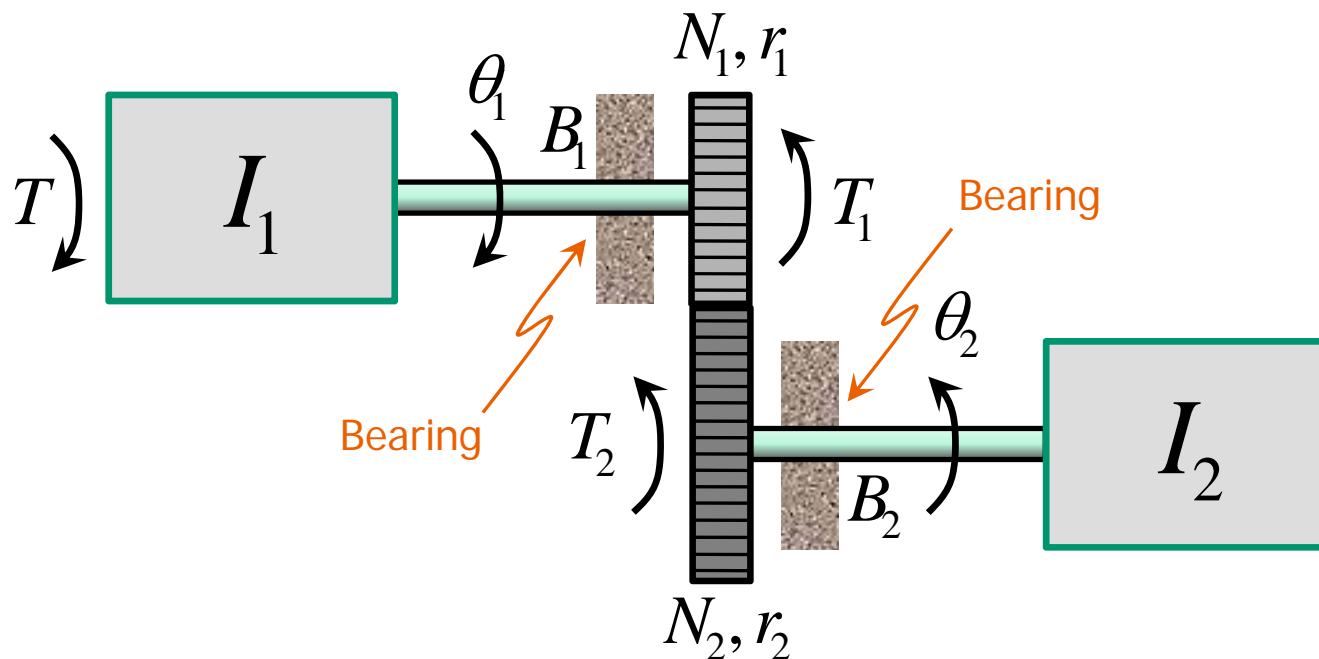

- Internal reaction torques: $T_1(t) = r_1 X(t)$, $T_2(t) = r_2 X(t)$
- Internal reaction force: $X(t)$ (See to Burns, Example 2.3)

Example – Real Gearbox

- Taper Roller Bearing



Example – Real Gearbox

- Ball Bearing



Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Simplifying assumptions:
 - We assume the gearbox to be *ideal* :
 - The inertia of each gear is small compared to the inertias I_1 and I_2
 - No friction present
 - No backlash present


- Model equations:

$$\frac{r_1}{r_2} = \frac{N_1}{N_2} = \frac{\theta_2}{\theta_1} = \frac{\dot{\theta}_2}{\dot{\theta}_1} = \frac{\ddot{\theta}_2}{\ddot{\theta}_1}$$

Example – Real Gearbox

(Similar to Burns, Example 2.3)


- Free-body diagrams for inertia I_1 :

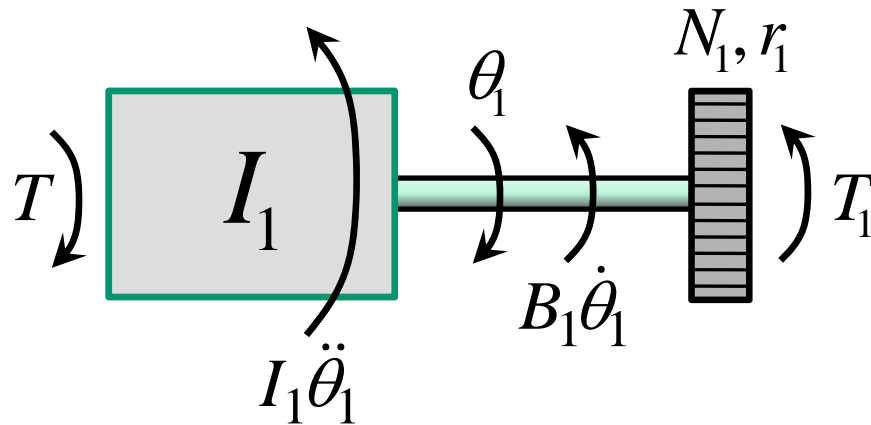

Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Free-body diagrams for inertia I_1 :

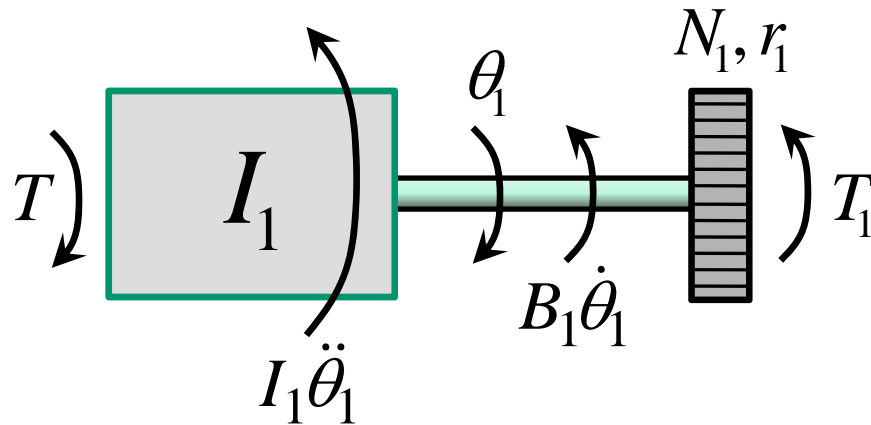


Newton's 2nd law: $T(t) - I_1 \ddot{\theta}_1(t) - B_1 \dot{\theta}_1(t) - T_1(t) = 0$

Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Free-body diagrams for inertia I_1 :

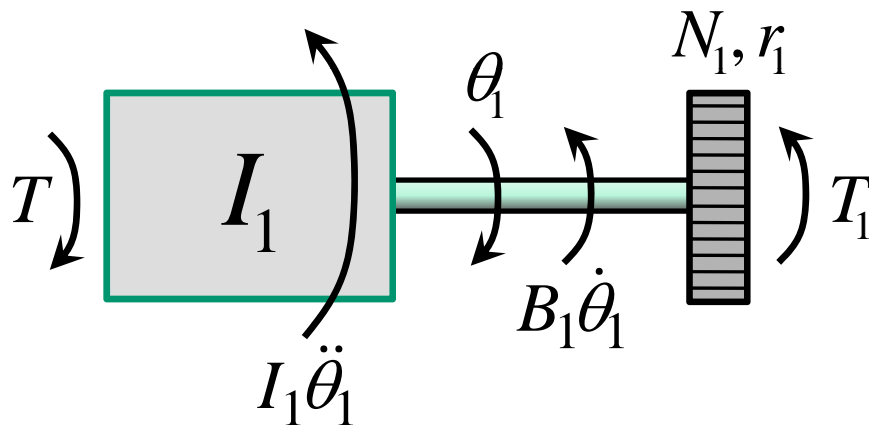


Newton's 2nd law: $T(t) - I_1 \ddot{\theta}_1(t) - B_1 \dot{\theta}_1(t) - T_1(t) = 0$

$$\Rightarrow T(t) - I_1 \ddot{\theta}_1(t) - B_1 \dot{\theta}_1(t) = T_1(t)$$

Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Free-body diagrams for inertia I_1 :

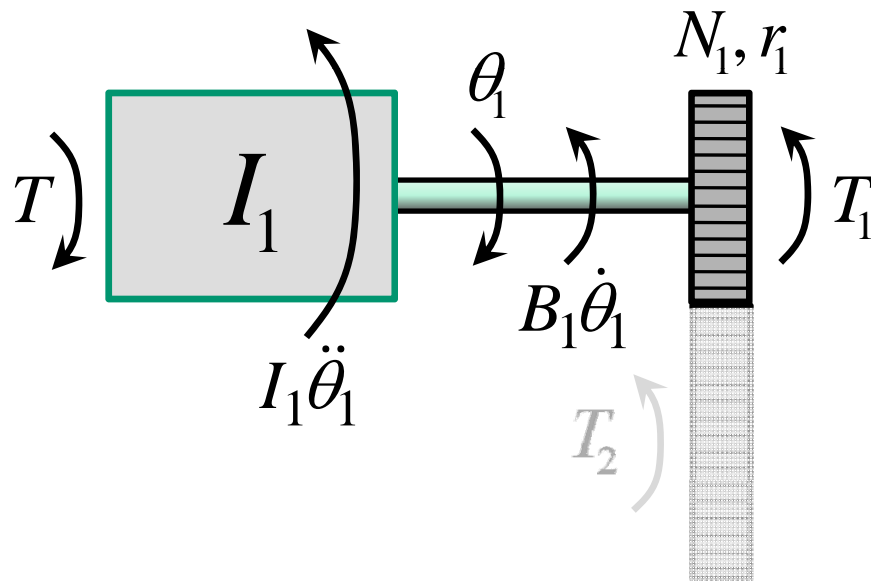

$$\frac{T_1(t)}{T_2(t)} = \frac{r_1 X(t)}{r_2 X(t)} = \frac{r_1}{r_2} = \frac{N_1}{N_2}$$

$$\Rightarrow T_1(t) = \frac{N_1}{N_2} T_2(t)$$


Newton's 2nd law: $T(t) - I_1 \ddot{\theta}_1(t) - B_1 \dot{\theta}_1(t) - T_1(t) = 0$

$$\Rightarrow T(t) - I_1 \ddot{\theta}_1(t) - B_1 \dot{\theta}_1(t) = T_1(t)$$

Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Free-body diagrams for inertia I_2 :

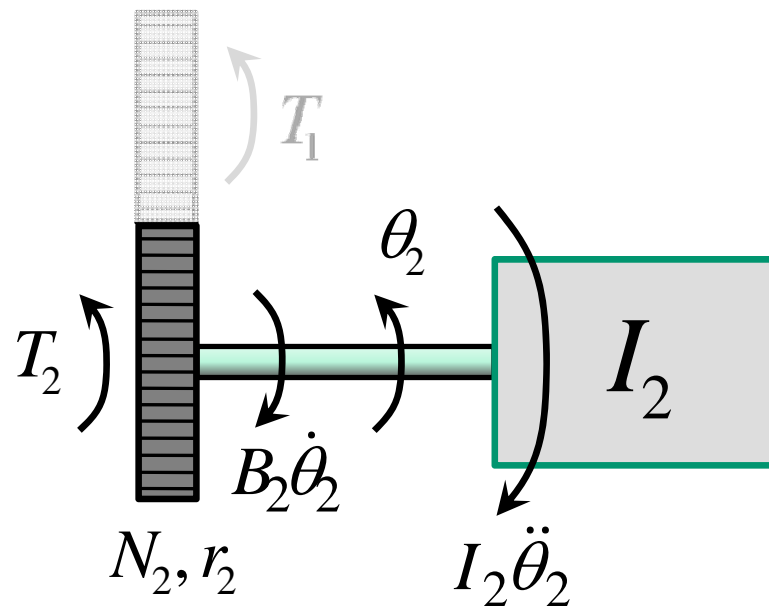


Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Free-body diagrams for inertia I_2 :

Newton's 2nd law: $T_2(t) - I_2\ddot{\theta}_2(t) - B_2\dot{\theta}_2(t) = 0$

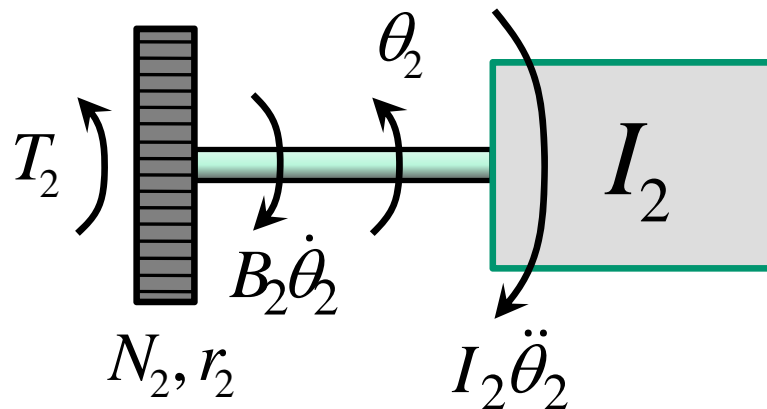


Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Free-body diagrams for inertia I_2 :

Newton's 2nd law: $T_2(t) - I_2\ddot{\theta}_2(t) - B_2\dot{\theta}_2(t) = 0$

$$\Rightarrow I_2\ddot{\theta}_2(t) + B_2\dot{\theta}_2(t) = T_2(t)$$

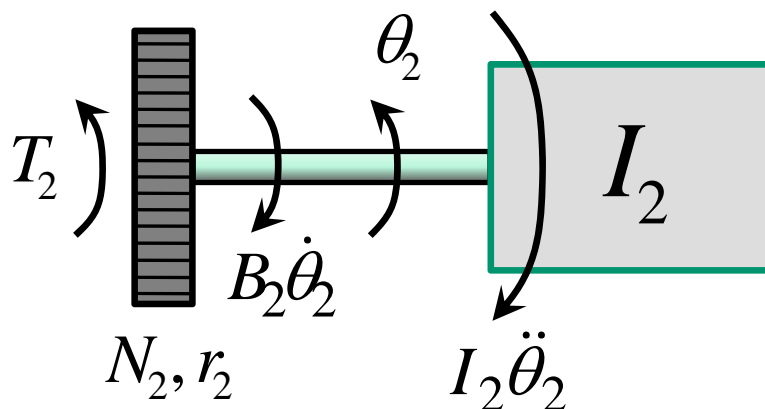

Example – Real Gearbox

(Similar to Burns, Example 2.3)

- Recalling that $\theta_2(t) = \frac{N_1}{N_2} \theta_1(t)$ and combining with the above two equations yields


$$\left(I_1 + \left(\frac{N_1}{N_2} \right)^2 I_2 \right) \ddot{\theta}_1(t) + \left(B_1 + \left(\frac{N_1}{N_2} \right)^2 B_2 \right) \dot{\theta}_1(t) = T(t)$$

or simply

$$\tilde{I}_1 \ddot{\theta}_1(t) + \tilde{B}_1 \dot{\theta}_1(t) = T(t).$$


- Parameters: $N_1, N_2, I_1, I_2, B_1, B_2$

Example – Mechanical System

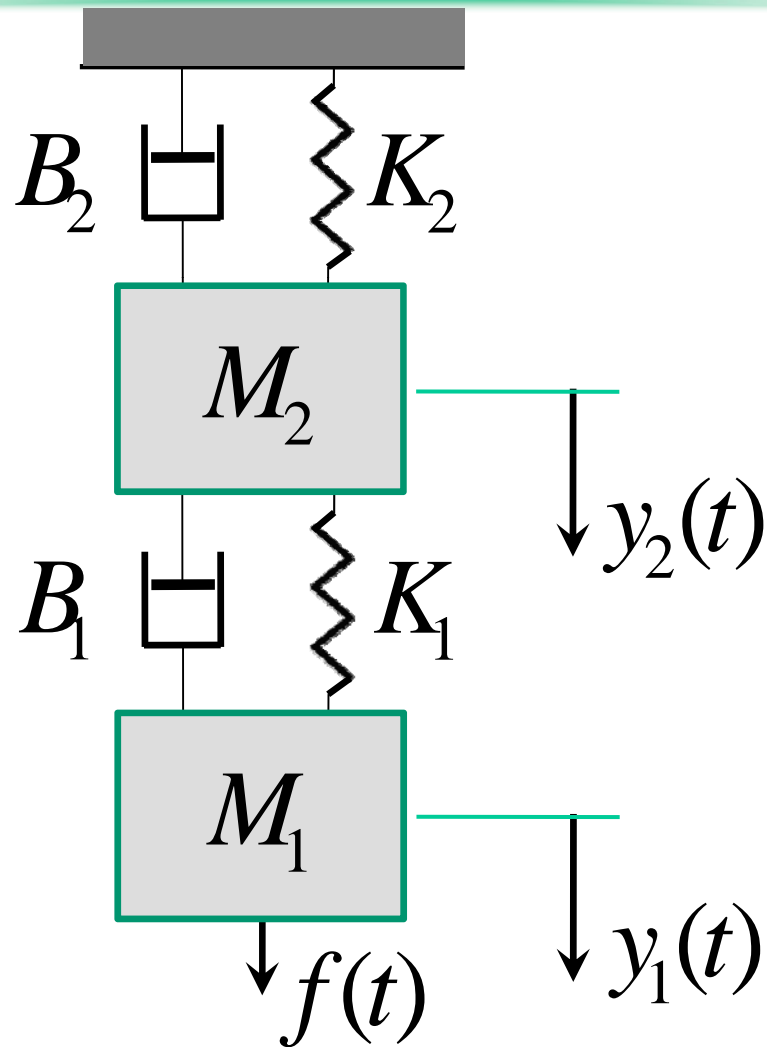


Example – Mechanical System

Free-body diagram for Mass 1:

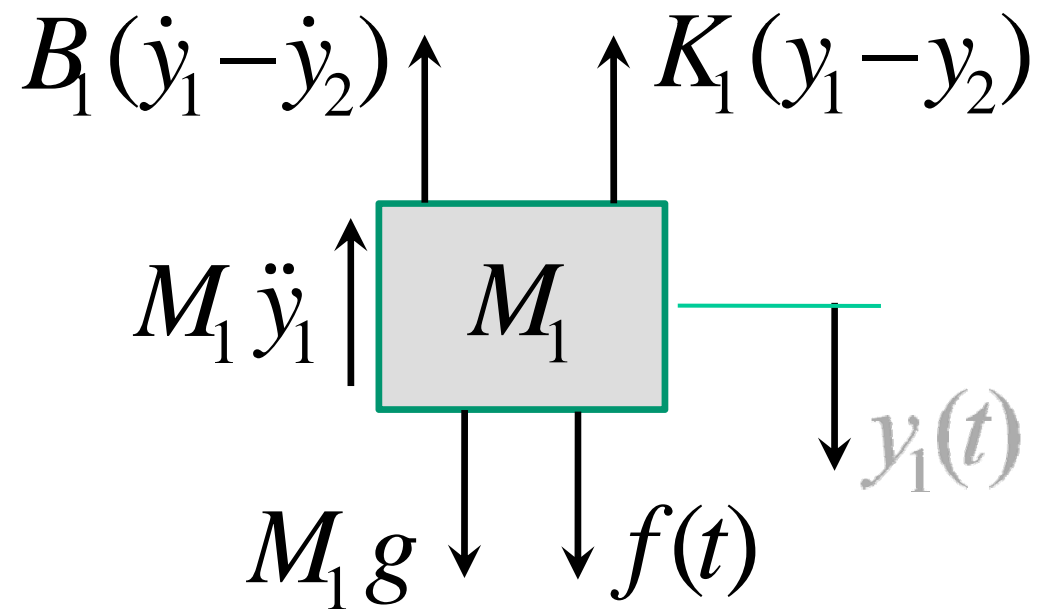

Example – Mechanical System

Free-body diagram for Mass 2:

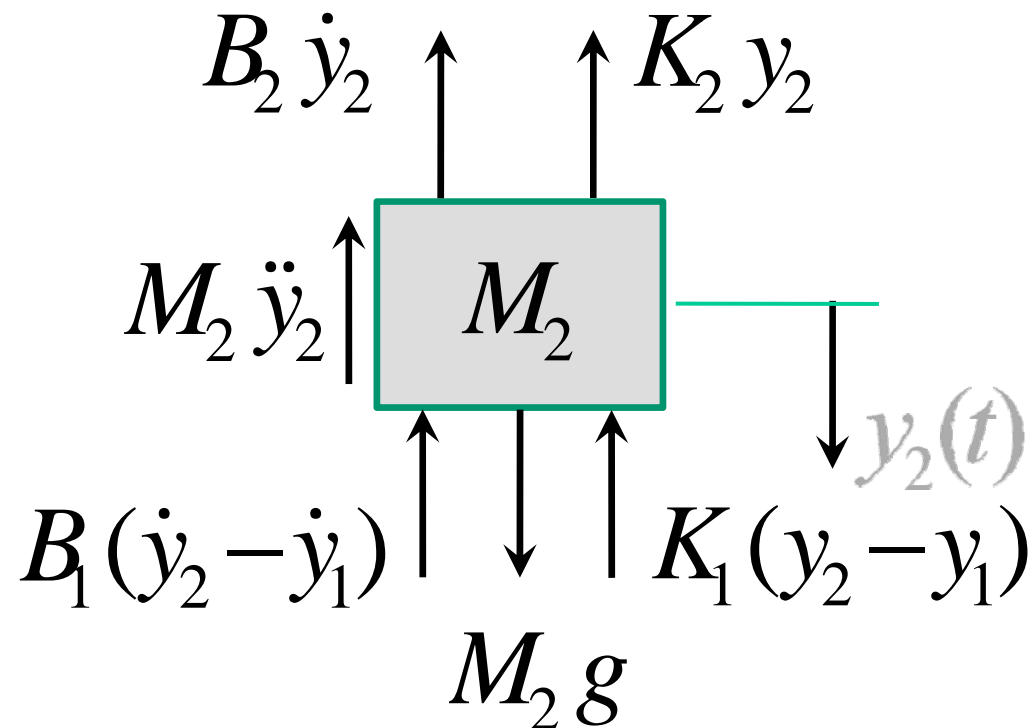

Example – Mechanical System

- Analysis – NII for Mass 1:

$$-M_1\ddot{y}_1 - B_1(\dot{y}_1 - \dot{y}_2) - K_1(y_1 - y_2) + M_1g + f(t) = 0$$

$$M_1\ddot{y}_1 + B_1\dot{y}_1 + K_1y_1 - B_1\dot{y}_2 - K_1y_2 = M_1g + f(t)$$

- Analysis – NII for Mass 2:


$$\begin{aligned} -M_2\ddot{y}_2 - B_2\dot{y}_2 - K_2y_2 - B_1(\dot{y}_2 - \dot{y}_1) \\ - K_1(y_2 - y_1) + M_2g = 0 \end{aligned}$$

$$-B_1\dot{y}_1 - K_1y_1 + M_2\ddot{y}_2 + (B_1 + B_2)\dot{y}_2 + (K_1 + K_2)y_2 = M_2g$$

Example – Inverted Pendulum


(Similar to Burns, Example 10.3)

- Input: Force, $u(t)$ Output: Angle, $\theta(t)$

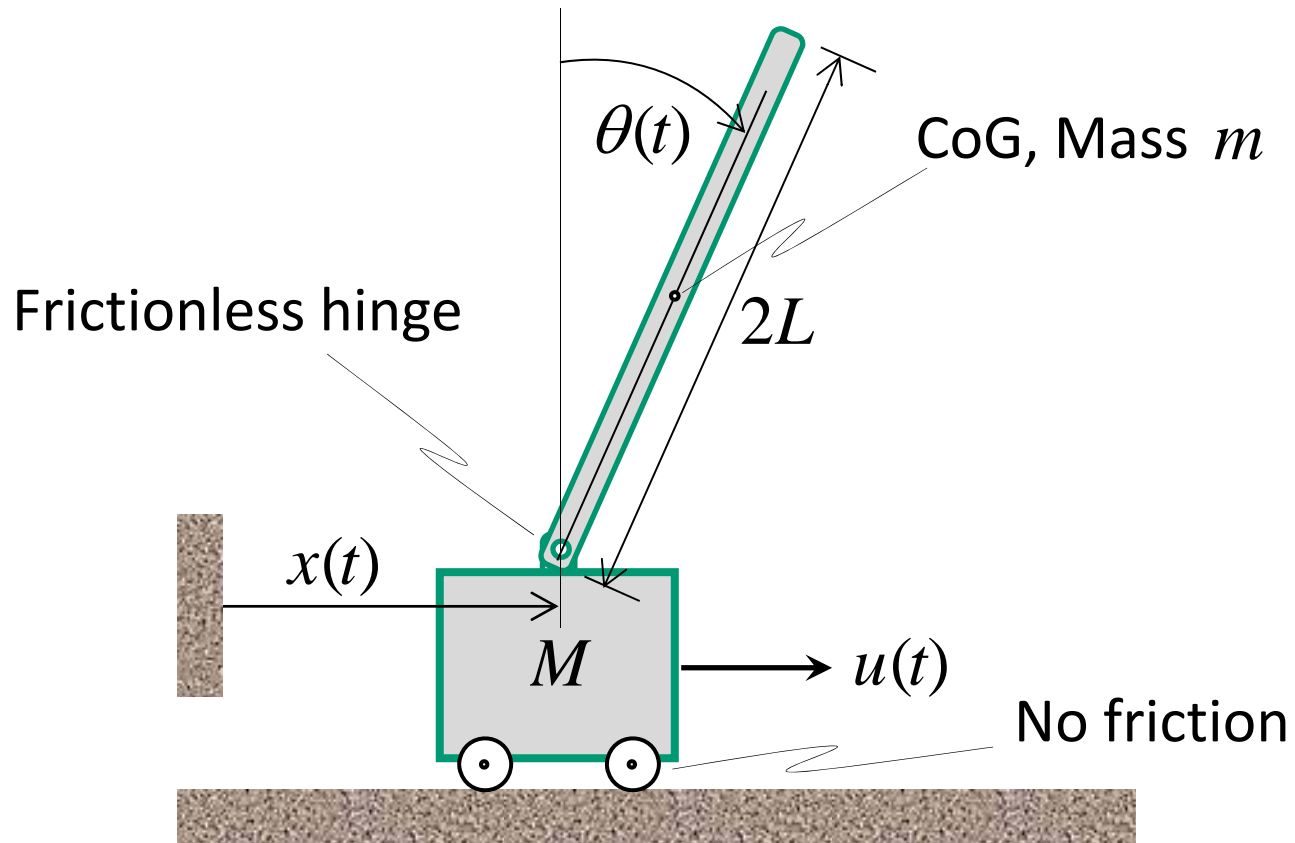

Example – Inverted Pendulum

Free-body diagram for the car:

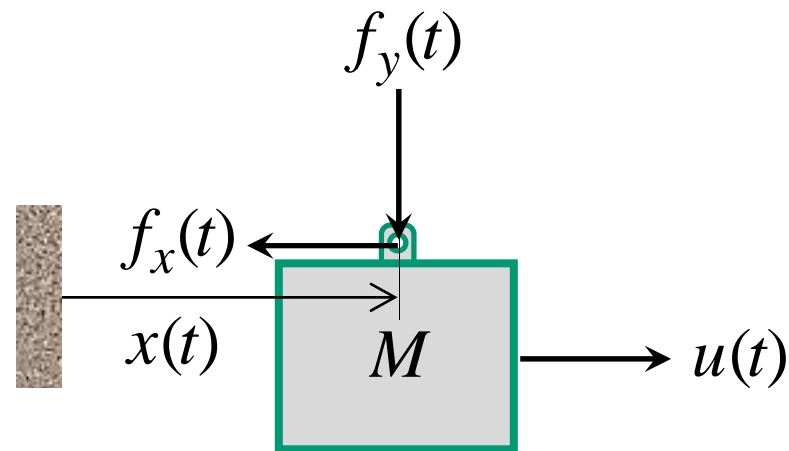


Newton's 2nd law, x -direction:

$$M\ddot{x} = u - f_x$$

Example – Inverted Pendulum

Free-body diagram for the pendulum:

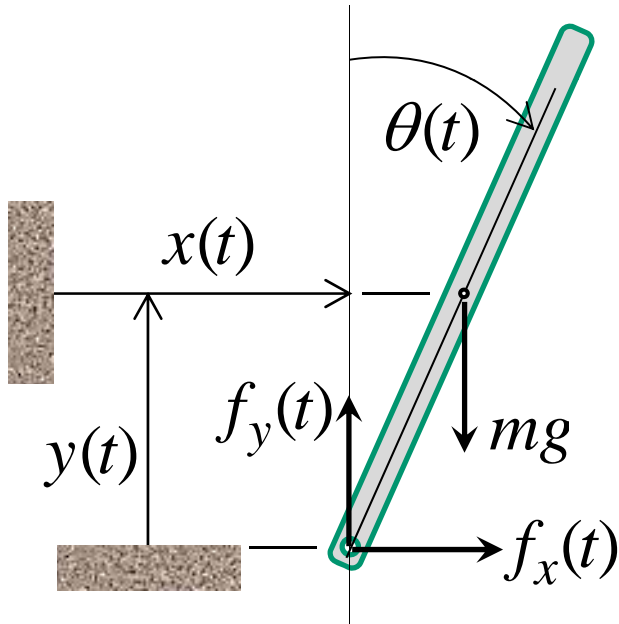

$$I = \frac{1}{3} mL^2$$

NII of CoG in x -direction:

$$m \frac{d^2}{dt^2} (x + L \sin \theta) = f_x$$

NII of CoG in y -direction:

$$m \frac{d^2}{dt^2} (L \cos \theta) = f_y - mg$$

NII for rotation about CoG:

$$I \frac{d^2 \theta}{dt^2} = f_y L \sin \theta - f_x L \cos \theta$$

Example – Inverted Pendulum

- Eliminating the reaction forces amongst these three equations yields two equations:

$$(m + M) \ddot{x} + \frac{1}{2} m L \cos \theta \ddot{\theta} - \frac{1}{2} m L \sin \theta \dot{\theta}^2 = u(t)$$

$$\frac{1}{2} m L \cos \theta \ddot{x} + \frac{1}{3} m L^2 \ddot{\theta} - \frac{1}{2} m g L \sin \theta = 0$$

Tutorial Exercises & Homework

- Tutorial Exercise

- A mechanical assembly (below) consists of two masses: a block of mass M_1 and a ball with mass M_2 , radius R_2 and moment of inertia I_2 about the centre of mass, rolling freely along the block M_1 without slipping. The block is connected to the wall by a spring K . A force $f(t)$ is applied to the block. The frictional damping constant between the table and the block is B .

Derive the equations describing the dynamics of this system.

Tutorial Exercises & Homework

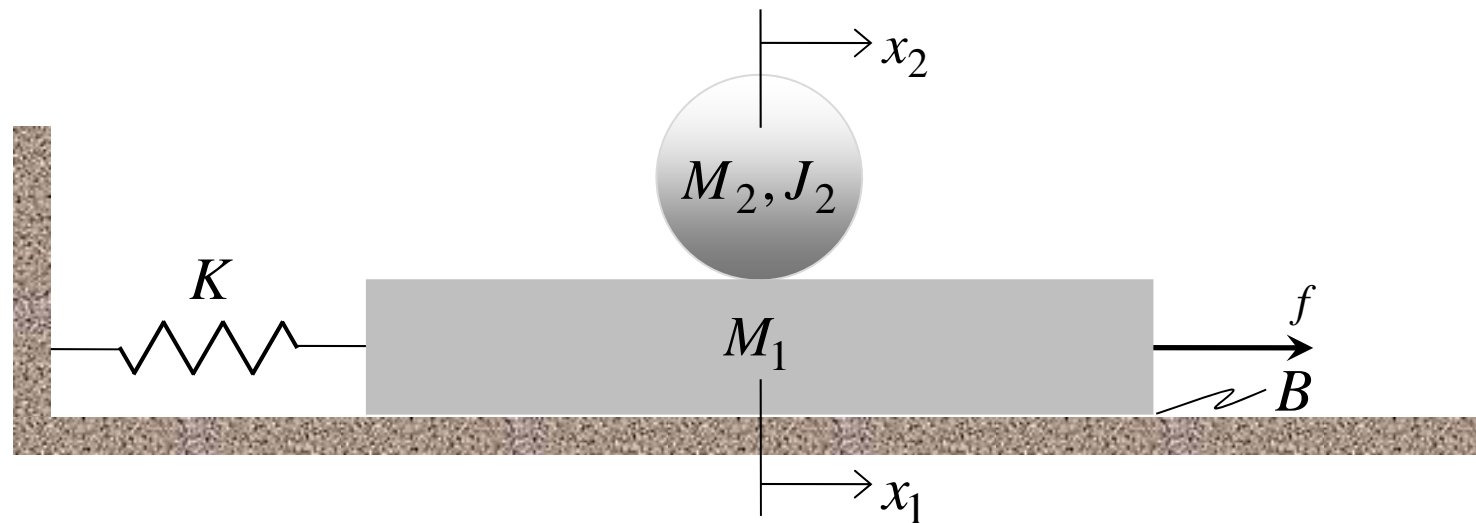


Figure: Mechanical assembly.

- Homework
 - None


Conclusion

- Example – Rotational Mechanical System
- Example – Translational Mechanical System
- Tutorial Exercises & Homework
- Notation/Conventions – vary from Book to Book

Next Attraction! – Miss It & You'll Miss Out!

- Electromechanical Energy Conversion
- Example – Brushed PM DC Motor

...



Thank you!
Any Questions?